

SPECIFICATION

Part No.: NSH-F200W




NEWSTAR LED Lighting

Features


- No UV or IR light radiation.
- Easy Installation
- Long lifetime: 50000 hours
- Correlated Color Temperature:2800-6500K
- AC 85-277V 50/60Hz.
- LED type: PHILIPS SMD3030
- IP65 Protection grade
- 3-5 Years Warranty
- CE, RoHS Certified



LUMINOUS INTENSITY DISTRIBUTION

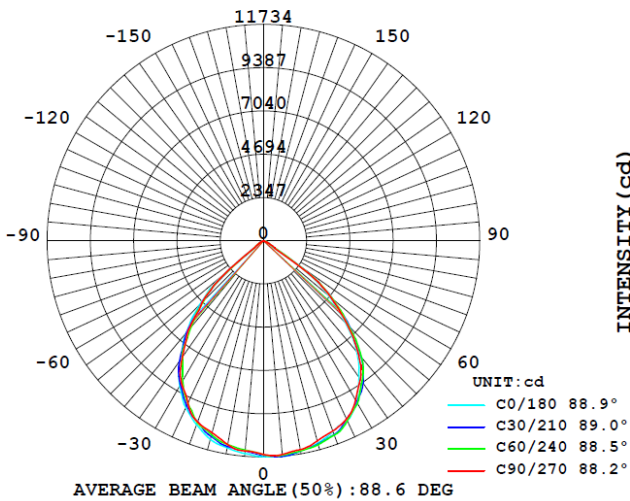

LUMINOUS INTENSITY DISTRIBUTION

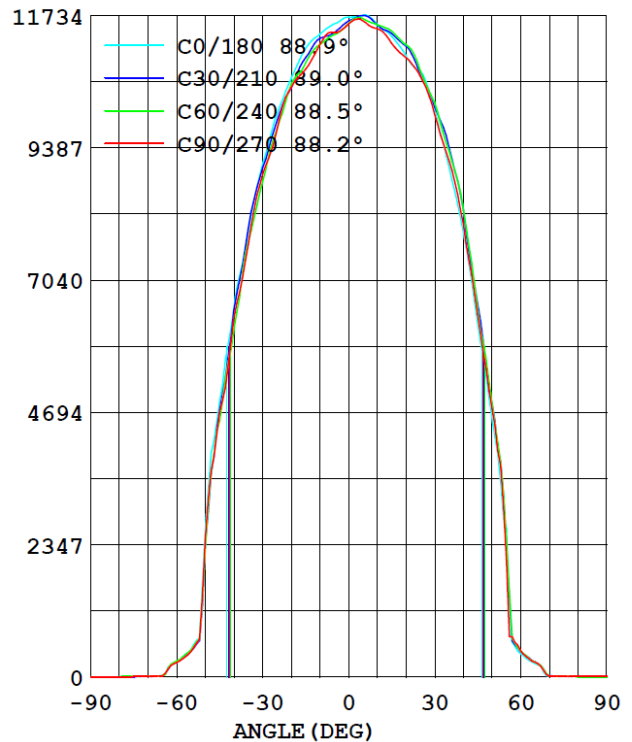

Technical Specifications

Power	200W	CRI	≥80
Lumens	21000LM	Color Temperature	2800~6500K
Fixture efficiency	>0.95	Beam Angle	120 Degree
Power Factor	>0.97	Frequency Range	50-60Hz
Light Source	PHILIPS SMD3030	Dimension	φ420*182MM
Driver	MeanWell & CE Driver	Working Temperature	-30°C ~+65°C
Body& Lampshade	Aluminum Alloy	Housing Color	Black/Silver

SPECIFICATION

Application

- Shopping mall lighting.
- Exhibition hall lighting
- Parking lot lighting
- Gymnasium lighting
- park, sculpture and national green lighting project
- Tourist attractions lighting
- Green area lighting
- The building elevation of lighting
- Other light sources

